



BIGROCKET

[SNAP] Cheat Sheet

Power LED



Status LED




interpretation

booting
booting done
connected to network
connected to ntrip server
RTK available
update FW from SD

Default SSID: SNAP-XXXX
Default Wifi Password: 123456789
Default IP in AP Mode: 192.168.1.1

VCC: 10V-30VDC
Ethernet: 100Base-T

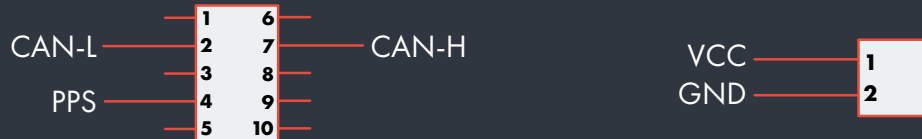

OnlineTools: service.bigrocket.de
Factory Reset: delete all data from SD Card and boot with empty card.

www.bigrocket.de

File: Settings.json

```
{
  "BuildTime": 1604996569,
  "NETWORK_SELECT": "WIFI|ETHERNET|AUTO",
  "DHCP": true|false,
  "IP": "Static IP of SNAP",
  "Gateway": "Gateway IP",
  "Subnet": "Subnetmask",
  "NtripUserName": "USERNAME",
  "NtripPassword": "PASSWORD",
  "NTRIPHostname": "NTRIP SERVER Domain Name",
  "NTRIPPort": 2101,
  "NTRIPMountpoint": "MOUNTPOINT",
  "storeDataToSD": false|true,
  "ENABLE_CAN": false|true,
  "MAIL": "your@email.com",
  "WIFI_SSID": "Your-Wifi_SSID",
  "WIFI_PASSWORD": "your_wifi_password",
  "CAN_MSG_ID1": "your_wifi_password",
  "CAN_MSG_ID2": "your_wifi_password",
  "CAN_MSG_ID3": "your_wifi_password",
  "CAN_MSG_ID4": "your_wifi_password",
  "CAN_MSG_ID5": "your_wifi_password",
  "CAN_MSG_ID6": "your_wifi_password",
  "CAN_MSG_ID7": "your_wifi_password",
  "CAN_MSG_ID8": "your_wifi_password",
}
```